



15th Annual Conference

2024 Winter Conference

February 7, 2024

Agriteer

Rockingham, Virginia



## Table of contents

|   |    |
|---|----|
| Agenda .....  | 4  |
| Speakers .....  | 5  |
| Board Members .....   | 6  |
| Exhibitor Levels .....                                      | 7  |
| Exhibitor Ads .....   | 9  |
| Impact of Cover Crops During a Drought .....                | 14 |
| Planter Drill Considerations for Conservation Tillage ..... | 16 |
| Exhibitor Directory .....                                   | 26 |

Disclaimer: Commercial products are named in this publication for informational purposes only. Virginia Cooperative Extension does not endorse these products and does not intend discrimination against other products which also may be suitable.



# Virginia Cooperative Extension

Virginia Tech • Virginia State University

[www.ext.vt.edu](http://www.ext.vt.edu)

Virginia Cooperative Extension is a partnership of Virginia Tech, Virginia State University, the U.S. Department of Agriculture, and local governments. Its programs and employment are open to all, regardless of age, color, disability, gender, gender identity, gender expression, national origin, political affiliation, race, religion, sexual orientation, genetic information, military status, or any other basis protected by law.

If you are a person with a disability and desire assistance or accommodation, please notify Doug Horn, Rockingham County, at (540) 245-5750 TDD\*) during business hours of 8 a.m. and 5 p.m.

\*TDD number is (800) 828-1120.

# Agenda

**February 7, 2024**

*15th Anniversary*

***“No-Till: The Passion & The Practical”***

**8:00 a.m. Registration and Trade Show**

**9:00 a.m.** *Regenerative Agriculture Concepts*

- Ray “The Soil Guy” Archuleta

**10:00 a.m. Trade Show Break**

**10:30 a.m.** *Well Sown Is Half Grown*

- Top do’s & don’ts for no-till planting success with farmers Clay Lowe & Jamie Shenk

**11:30 a.m.** *No-Till Champion Recognition*

**Noon Lunch and Trade Show Break**

**1:15 p.m.** *How Do We Get There?*

- Ray “The Soil Guy” Archuleta

**2:15 p.m.** *Lessons Learned from Our 2023 Growing Season*

- Panel of Virginia No-till Farmers  
Moderated by Chris Lawrence, VA  
NRCS

**3:15 p.m. Sessions Adjourn**

## 2024 Speakers

**Ray Archuleta** is a nationally-recognized expert, deep thinker, and inspirational speaker on soil health management. He has traveled to and taught soil health principles in all 50 states. He retired from NRCS after 30 years of service and is a Certified Professional Soil Scientist. Ray received his AS degree in Livestock Science from Northern New Mexico College and a BS degree in Agricultural Biology plus 30 hours of graduate work in soil related courses from New Mexico State University. He served in the Peace Corps for two years in Guatemala as a Livestock Specialist.

After his retirement from the NRCS in 2017, Ray founded Understanding Ag. LLC, and Soil Health Academy. Ray and his wife Sonja own and operate a 155-acre (66 Ha) sheep ranch near Seymour, Missouri.

**Clay Lowe** farms 1,500 acres of peanuts, cotton, soybeans, corn, wheat, rye, and oats with his dad & brother in Surry and Sussex Counties, VA. The Cedar Point Farm team are dedicated to soil & yield improvement through minimal tillage, cover cropping, and crop rotation. They are exceptional equipment innovators and fabricators. Another special focus for Clay is profitability analysis thanks to his Ag Economics degree from NC State University.

**Jamie Shenk** is the manager of Beauregard Farms in Brandy Station, VA, a 3,200-acre tract producing corn, soybeans, small grain, beef cattle, hay, and lumber. With a background in dairy farming, diesel mechanics, and precision agriculture, Jamie Shenk joined Beauregard Farms in 2012. Jamie has carried on a long tradition of no-till at Beauregard, while also helping the operation evolve to include a wide range of additional practices aimed at improving soil, yield, efficiency, and profitability.

### Lessons Learned from Our 2023 Growing Season

Panel of advanced Virginia no-tillers share practical advice

Moderated by Chris Lawrence, NRCS Agronomist

**Chris Lawrence** has served as State Cropland Agronomist for USDA's Natural Resources Conservation Service (NRCS) in Virginia since 2004. He provides state-wide technical training and direct assistance to NRCS field staff, public- and private-sector partners, and farmer clients on topics including soil health/soil quality, erosion prediction & prevention, cover crops, and nutrient management. Prior to joining NRCS, Chris served as an agricultural Extension Agent for five years in the Shenandoah Valley and northern Coastal Plain regions of Virginia.

## 2023 - 2024 VANTAGE Board Members

### Producer Members

|                |                |              |
|----------------|----------------|--------------|
| Doug Fifer     | President      | Mount Solon  |
| Shane Richman  | Vice President | Edinburg     |
| Kevin Lloyd    |                | Singers Glen |
| Charlie Garber |                | New Market   |
| Wayne Garber   |                | Mount Sidney |
| Brett Wightman |                | Edinburg     |

### Agribusiness Members

|                  |           |                        |              |
|------------------|-----------|------------------------|--------------|
| Stewart Detamore | Treasurer | S. L. Hess & Sons      | Harrisonburg |
| Bailey Carpenter |           | Rockingham Cooperative | Bridgewater  |
| Wally Beckner    |           | Houff Corporation      | Lexington    |

### Advisors

|                  |  |                   |
|------------------|--|-------------------|
| Doug Horn        | Virginia Cooperative Extension         | Augusta County    |
| Bobby Clark      | Virginia Cooperative Extension         | Shenandoah County |
| Chris Lawrence   | Natural Resources Conservation Service | Richmond          |
| Lydia Fitzgerald | Natural Resources Conservation Service | Richmond          |

The **Virginia No Till Alliance** exists to maximize farm productivity and profitability by promoting successful implementation of continuous no-till systems through shared ideas, technology, conservation and education.

The VANTAGE Board of Directors is made up of farmers and agri-business representatives in the Shenandoah Valley region of Virginia.

Many thanks to all of the supporters of the VANTAGE Winter Conference

**Platinum Exhibitors**

Natural Resources Conservation Service

Agriteer

**Gold Exhibitors**

Houff Corporation

Advance Agra

S. L. Hess & Sons

Rockingham Cooperative

Kings AgriSeeds

**Silver Exhibitors**

Farm Credit of the Virginias

BASF

First Bank & Trust

Bayer

Timac Agro

Neudorff

Osprey Drone Services

Farmers and Merchants Bank

Virginia Silo

## **Bronze Exhibitors**

AgrAbility

Virginia Soybean Association

Frazier Quarry

Augusta Seed

Conklin

Chesapeake Bay Foundation

Corteva

Histand Services

Valley Fertilizer

Lush AI

Colonial SWCD

Crabbe Aviation

Southland Dairy Farmers

Rockbridge Farmer's Cooperative

Virginia Silo

Shenandoah Valley SWCD

Windy Hollow Farms

Funding for today's speakers and the Farmer to Farmer Mentoring program was made possible by a grant from the National Fish and Wildlife Foundation



NFWF



---

Chesapeake Bay Stewardship Fund



# Houff

CORPORATION



**FERROXX**  
SLUG AND SNAIL BAIT

Stop slugs now with Ferroxx's iron chelate bait and revolutionary Micropellet™ technology.

Proven  
Performance  
and Value




 **BASF**  
We create chemistry



AGRONOMY DIVISION

Providing precision agronomy services  
benefitting your farm operation where it  
matters most.

[www.rockinghamcoop.com](http://www.rockinghamcoop.com)

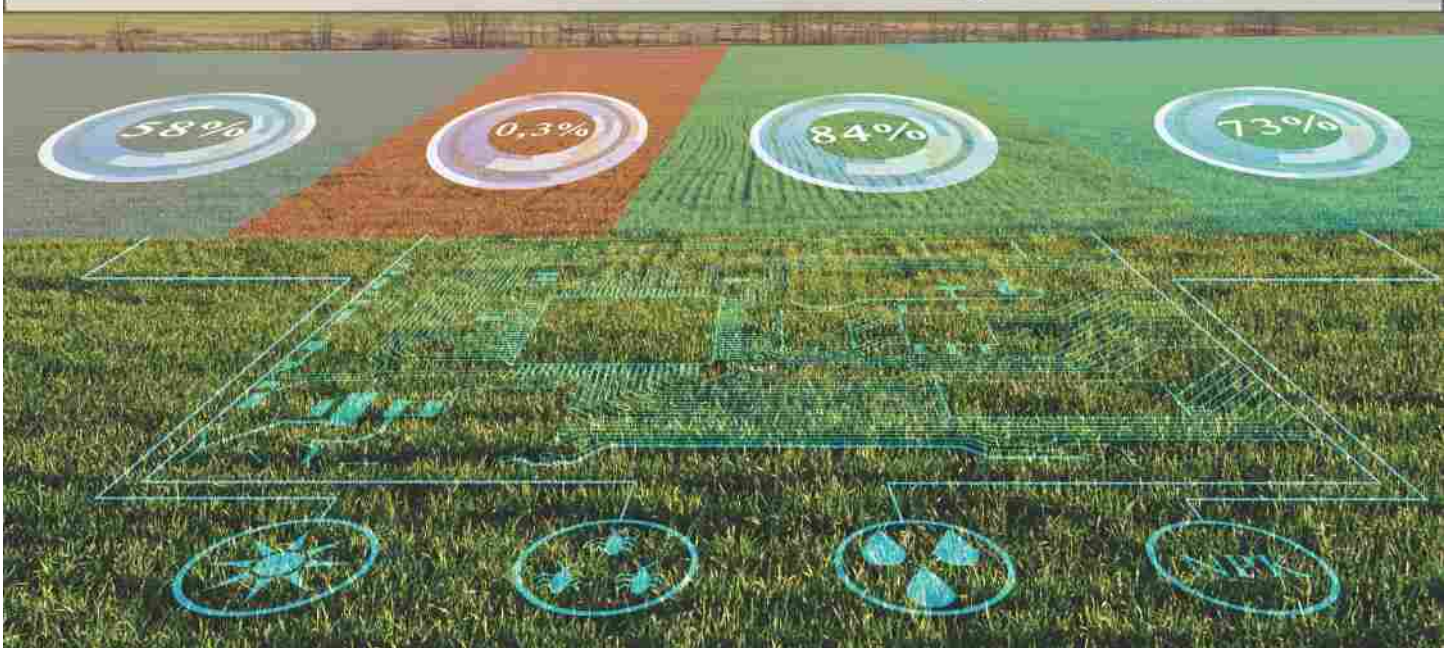

Science For A Better Life

Heidi Dillehay

862-330-6966

[Heidi.Dillehay@bayer.com](mailto:Heidi.Dillehay@bayer.com)



We are here for our  
Virginia Farmers



▲ Bobby Williams  
540-437-3468



▲ Daniel Scott  
540-580-9032



▲ Paul Eberly  
540-437-3461



▲ Ashley McClure  
540-698-1305

[fmbankva.com](http://fmbankva.com) | NMLS# 414464

Member  
FDIC





**King's AgriSeeds inc.**  
FEEDING YOUR FARM'S FUTURE

- COVER CROPS
- WINTER ANNUALS
- SUMMER ANNUALS
- PERENNIAL MIXTURES
- AWARD WINNING KINGFISHER CORN HYBRIDS
- POLLINATOR MIXTURES
- AND MORE

**(717) 687-6224 —**  
**kingsagriseeds.com**

**Contact your local dealer**  
**today to find the best fit for your farm!**



**Think Different—Farm Better**

**Daryl Clay**

**Agronomic Technical Consultant**

**757-556-7117**

**daryl.clay@timacusa.com**

**www.us.timacagro.com**



**4<sup>th</sup> in the Nation**  
among Ag banks and the 30th largest agricultural lender among all U.S. commercial banks.

**First Bank & Trust Company**  
[www.firstbank.com/ag](http://www.firstbank.com/ag)

Allow our team to assist you with the financial needs for your operation.

Shenandoah Valley 540.437.0604 • New River Valley 540.583.5458  
Southwest Virginia 276.623.0128 • Eastern Virginia 804.550.5700

\*Ag loans and loans secured by farmland equal or exceed 25 percent of total loans.  
FDIC Data as of June 30, 2022. Member FDIC



# YOUR BEST YIELDS EVER.

[advanceag.net](http://advanceag.net) | 877-702-7333

With new seed varieties being created every year, many farmers rely on data collection and research concerning new hybrids. Advance Agra Service is a leader in conducting on-farm testing and works hard to bring VA and NC growers the **highest yielding corn and soybean seed varieties** in their respective locations. We work with you and for you to move yields forward.



## WE CAN HELP YOUR NO-TILL FILL YOUR TILL.

### LOANS FOR:

- Farms
- Barns and buildings
- Large and small tracts of land
- Fences and roads
- Operating expenses
- Refinancing
- Equipment
- And much more!



## FARM CREDIT

*Lends for  
Farms, Homes & Land!*

800.919.FARM (3276)

[FarmCreditofVirginias.com](http://FarmCreditofVirginias.com)




# DRONE SALES SEEDING CROP IMAGING SPRAYING

*"from the eye of an Osprey"*

PETE SHANLEY | Gordonsville, VA | 413-884-5022

SEAN BURNETTE | Pleasureville, KY | 502-229-8200

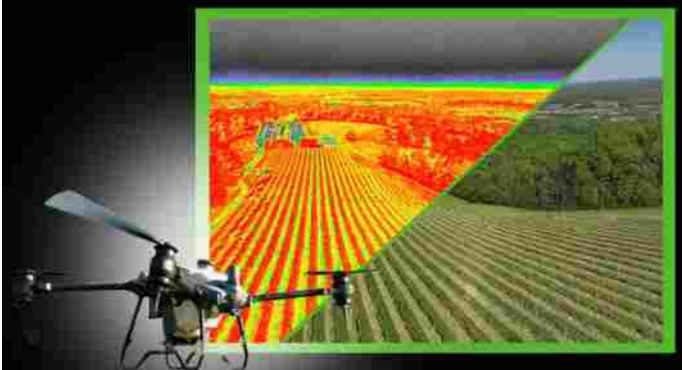


**OSPREY DRONE**  
SERVICES, LLC

[www.osprey-drones.com](http://www.osprey-drones.com)



# S.L. HESS & SONS, Inc.

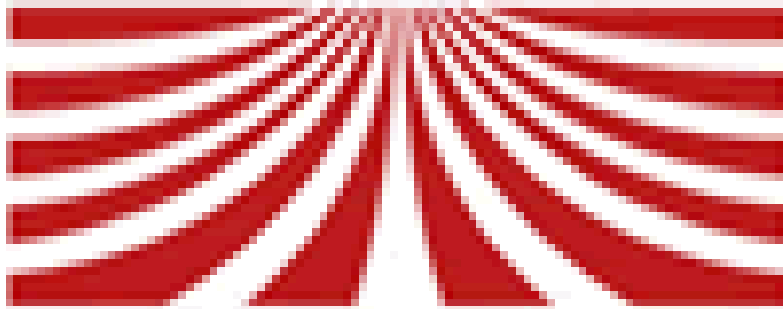

## REVERE SEED®



Grain Storage and  
Handling Systems  
Ag Feeding Systems  
Spantech Fabric Structures



4446 Rawley Pike | Harrisonburg, VA 22801  
540.879.2541





## Impact of Cover Crops During a Drought

Doug Horn, Crops & Soils Extension Agent, Augusta County

A cover crop versus fallow (no cover crop) field demonstration was initiated in northwest Augusta County. The field was planted to full season corn on May 17, 2023. The two fallow plots were no till planted into undisturbed soybean residue. The rest of the field was planted green into a rolled cover crop of wheat and hairy vetch. Two replications of each treatment were planted into plots measuring 60 feet by 300 feet. The fallow plots germinated quickly and displayed a uniform stand and growth. The cover crop plots were slow to emerge with considerable variability in plant spacing and uniformity. This trend continued into July (see Figure 1). The site received 6.5 inches of rainfall from June 19 to July 1 (13 days) then dried up again.

*Figure 1. Corn growth 7 weeks after planting*



By early September the corn in the cover crop plots had attained the same amount of growth and height as the fallow plots. The cover crop plots were still green while the fallow plots were showing significant senescence. The corn ears were about the same size but the cover crop plots had more moisture in the ears and were maturing slower.

The plots were harvested on November 28. The combine yield monitor was used to determine the yield for each plot. Each plot was harvested individually. The data are presented in Figure 2. The cover crop plots averaged 152 bushels/acre whereas the fallow plots averaged 118 bushels per acre.

*Figure 2. Corn yields from combine yield monitor. The dark green represents the highest yielding areas while the red represents the lowest yielding areas.*



This is just one observation in a highly variable year. In a dry spring cover crops should probably be terminated early to avoid robbing the cash crop from moisture at planting. The 6.5 inches of rain in mid-season saved the cover cropped plots. Had the rain not occurred the yield would have probably been much lower. The cover crop allowed better absorption of the rainfall and kept the moisture in the system to be better utilized by the growing crop. The cover cropped plots also had considerably less weed pressure at harvest than the fallow plots due to the residual residue.



Virginia Cooperative Extension is a partnership of Virginia Tech, Virginia State University, the U.S. Department of Agriculture, and local governments. Its programs and publications are open to all, regardless of age, race, disability, gender, gender identity, genetic expression, national origin, political affiliation, sexual orientation, marital status, genetic information, or any other basis prohibited by law.





# Planter/Drill Considerations for Conservation Tillage Systems

*Robert “Bobby” Grisso, Extension Engineer, Biological Systems Engineering, Virginia Tech*  
*David Holshouser, Extension Soybean Specialist, Tidewater Agricultural Research and Extension Center*  
*Robert Pitman, Superintendent, Eastern Virginia Agricultural Research and Extension Center*

No-till planters and drills must be able to cut and handle residue, penetrate the soil to the proper seeding depth, and establish good seed-to-soil contact. Many different soil conditions can be present in the Mid-Atlantic region at planting time. Moist soils covered with residue, which may also be wet, can dominate during the late fall and early spring and, occasionally, in the summer. Although this condition provides an ideal environment for seed germination, it can make it difficult to cut through the residue. In contrast, hard and dry conditions may also prevail. Although cutting residue is easier during dry conditions, it is more difficult to penetrate the hard, dry soils. Proper timing, equipment selection and adjustments, and crop management can overcome these difficult issues.

## Condition of the Field and Residue

Management of the previous crop residue and weed control are key factors for successful no-till equipment operation. If residue and weed issues are not considered, then the ability of the planter or drill to perform its functions is greatly limited. The residue has to be uniformly spread behind the combine if the opening devices are going to cut through the material. It is very difficult for the planter/drill to cut the residue if the combine has left a narrow swath of thick residue and chaff. Equip the combine with a straw chopper and chaff spreader to distribute residue and chaff over the entire cut area.

For example, a 30-foot platform header cutting high-yielding small grain will dump the material into a five/six foot swath. This swath contains five to six times more material than the other cut area. This mat of mate-

rial is an ideal place for disease and pest problems to accumulate and increases problems relating to cutting residue and penetrating the soil. This mat can create a lot of variability, which makes it difficult to adjust the planter/drill for proper operation, and this can limit successful emergence and early crop growth. Experience has shown that the residue is best handled by the planter/drill when the residue remains attached to the soil and standing. When the standing residue is shredded and chopped in a separate operation, it has a tendency to mat and remain moist longer than residue left standing. The loose residue may not flow through the planter/drill as well and has the potential to plug opening devices.

The other key is weed control. If standing weeds exist, the planter/drill must cut and move this extra living plant material through the system. In addition, mature weeds have viable seeds that will germinate ahead of the crop. Weeds that have a head start on the crop will compete for light, water, and nutrients more than weeds emerging with the planted crop. Therefore, weeds need to be controlled before crop emergence or soon afterward to prevent yield loss.

## Row-Cleaning Devices

Row-cleaning attachments are not necessary in most no-till applications, especially if coulters or double disk furrow openers cut the residue. However, row cleaners can help warm the cool early spring soils by moving the residue away from the row and exposing the clean row to direct sunlight and air. When planting in heavy surface residue in early spring, using row cleaners to move only residue away from the row can aid in soil warm-up. This can be especially helpful on poorly drained soils.



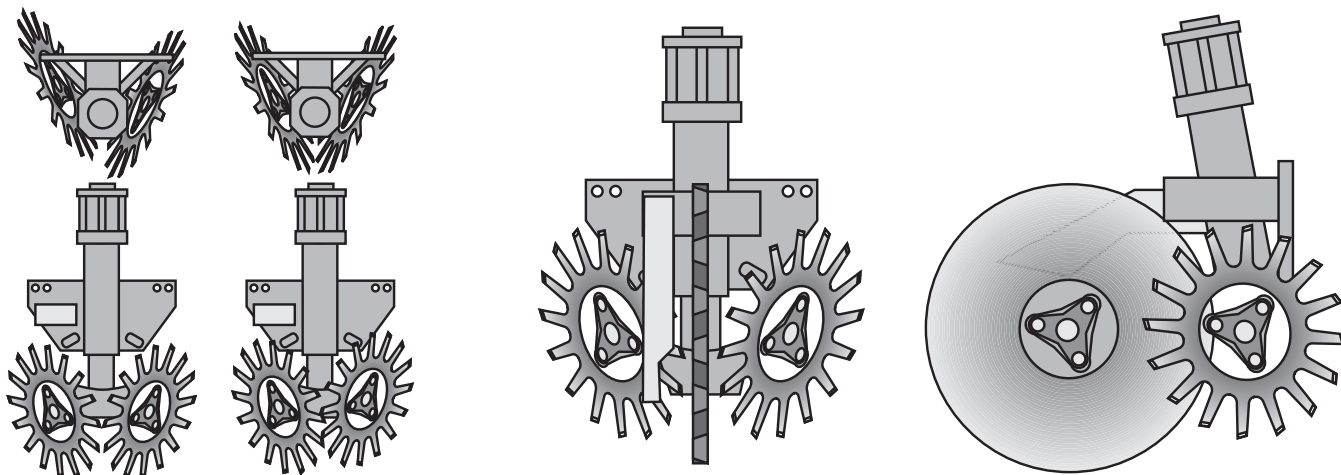


Figure 1. Row-cleaning devices on a planter unit will move residue from the seed zone.

Double disk furrowers, spoked “spider-wheel” row cleaners (figs. 1), row-cleaning brushes, sweeps, or horizontally mounted disks in front of the planting unit move residue away from the row. Disk row cleaners are also useful in moving clods.

Row cleaners should not be used on highly erodible soils or in areas where moisture conservation is needed. Residue over the row reduces raindrop impact, slows runoff, and provides a mulch to reduce drying of the seed zone. On poorly drained soils, spoked “spider-wheel” row cleaners could be used to move residue off the row to aid in soil drying. Unlike disk row cleaners, the spoked wheels should be set to move only residue and not contact the soil. Soil can fill the areas between the spokes and render the wheels ineffective.

When furrowing devices are used to move residue, clods, or soil from the row, any previously applied herbicide will be moved out of the row area, leaving an untreated seedbed. An alternative herbicide program or a band application of herbicide behind the planting unit may be needed.

## Coulters and Seed Furrow Openers

The primary differences between conventional planter/drill systems and those designed for conservation tillage systems are the down pressure and weight. Because the no-till openers and soil-engaging devices deliver more down pressure to penetrate much firmer soils and cut the residue, the conservation planter/drill systems are

built heavier and have the ability to carry much more weight than conventional tillage systems.

Although not necessary, coulters can be added in front of the planter openers to ensure residue cutting. For adequate coulters penetration, weight may have to be added to the carrier. Some planter/drills use a weight-transfer linkage to transfer some of the tractor weight to the coulters to ensure penetration. Because coulters are usually mounted several feet in front of the seed opening/placement device (in the case of coulters caddies even farther), many use wide-fluted coulters (fig. 2). A pivoting hitch or a steering mechanism will keep the seed openers tracking in the coulters slots.

Wide-fluted coulters (2 to 3 inches wide, see fig. 2) perform the most tillage and open a wide slot in the residue. This wide slot allows the soil to warm-up faster (more drying, may be a disadvantage in some situations) and may prepare an area for improved soil-to-seed contact. However, because of the increased cutting surface, fluted coulters require more weight for penetration, disturb more soil surface, and bury more residues. In wet conditions on medium- and fine-textured soils, fluted coulters may loosen too much soil and cause the loose, wet soil to stick to the seed openers and press wheels. This will result in clogging, inconsistent depth control, and poor soil-to-seed contact.

Narrow-fluted coulters (0.5 to 1.0 inch wide, see fig. 2) or narrow bubble coulters, ripple coulters, and turbo-rippled coulters do not require as much weight for penetration and do not throw as much soil out of the seed furrow as the wide-fluted coulters. Ripple coulters with

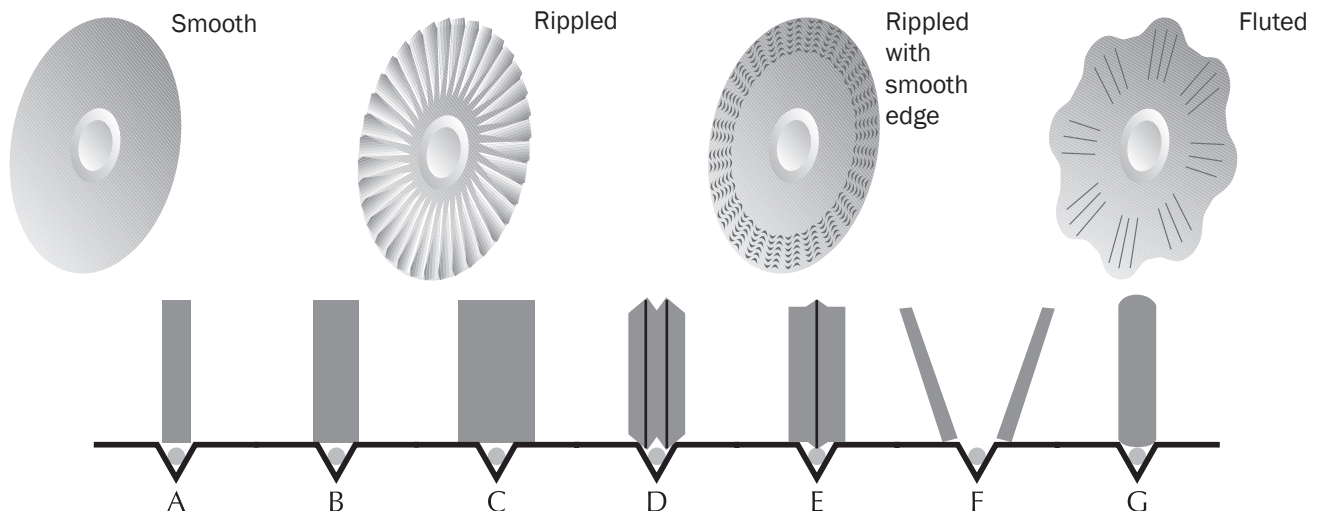


Figure 2. Top row shows common couler styles and the bottom shows various types of press wheels. Press wheels (bottom row) are defined as: (A) 1-inch-wide wheel that presses directly on the seed in the bottom of the seed furrow, (B) 2-inch-wide wheel that presses on the seed and gauges planting depth by riding on the sides of the seed furrow, (C) wide press wheel that gauges planting depth but does not press directly on the seed, (D) wide press wheel with two ribs that applies pressure on the side of the seed furrow to press soil on the seed while gauging the depth, (E) wide press wheel with one center rib that applies pressure on the seed furrow to press while gauging the depth, (F) pair of angled press wheels that close the seed furrow and establish seed-to-soil contact, and (G) narrow steel press wheel that applies pressure directly on the seed but does not flex to “shed” soil in sticky conditions.

a smooth edge or smooth coulters are preferred for residue cutting. They can be sharpened to maintain the cutting surface. Operate all coulters close to seeding depth (fig. 3) to avoid excessive soil throwing at high operating speeds and to limit the formation of air pockets below the seed furrow. Use the largest diameter coulters available (that fit the planter, coulters-caddy, etc.) because they have the best angle for cutting residue.

Most no-till planters/drills are equipped with independent seeding units that should allow at least 6 inches of vertical movement. This will allow the unit to operate over rough transit, over non-uniform surfaces, and adjust for root stubs and other obstacles. These units are sometimes staggered to provide more side-to-side space for residue flow, which helps with unit function. These units should be equipped with heavy down pressure springs and sufficient weight to ensure penetration of both the coulters and seed furrow openers into untilled soil. Usually these springs are adjustable and multiple springs can be added if insufficient pressure is achieved.

Some no-till planters/drills are not equipped with coulters (figs. 3-A and 3-D). These planters/drills use the seed furrow openers to cut and place the seed. Several planter/drill systems have a staggered double disk seed furrow opener without a coulters (figs. 3-C and 3-E). The leading disk (usually 0.5 to 1.0 inch in front) cuts the residue and the second aids in opening the seed furrow. Some manufacturers use a single, large disk set at a slight angle. These units require less weight for penetration and provide minimal soil disturbance.

## Adjusting Disc Openers

Operators of no-till planters/drills with offset double disk openers need to watch the leading edge of the double disks for significant wear. Single-disk openers are also subject to similar wear. Essentially, the leading edge of the disk takes the abrasion and wear of cutting straw or stalks and penetration into the soil. The leading and trailing disk typically are two different parts and cannot be interchanged. As the double disk openers wear, check the gap between them. If a gap opens

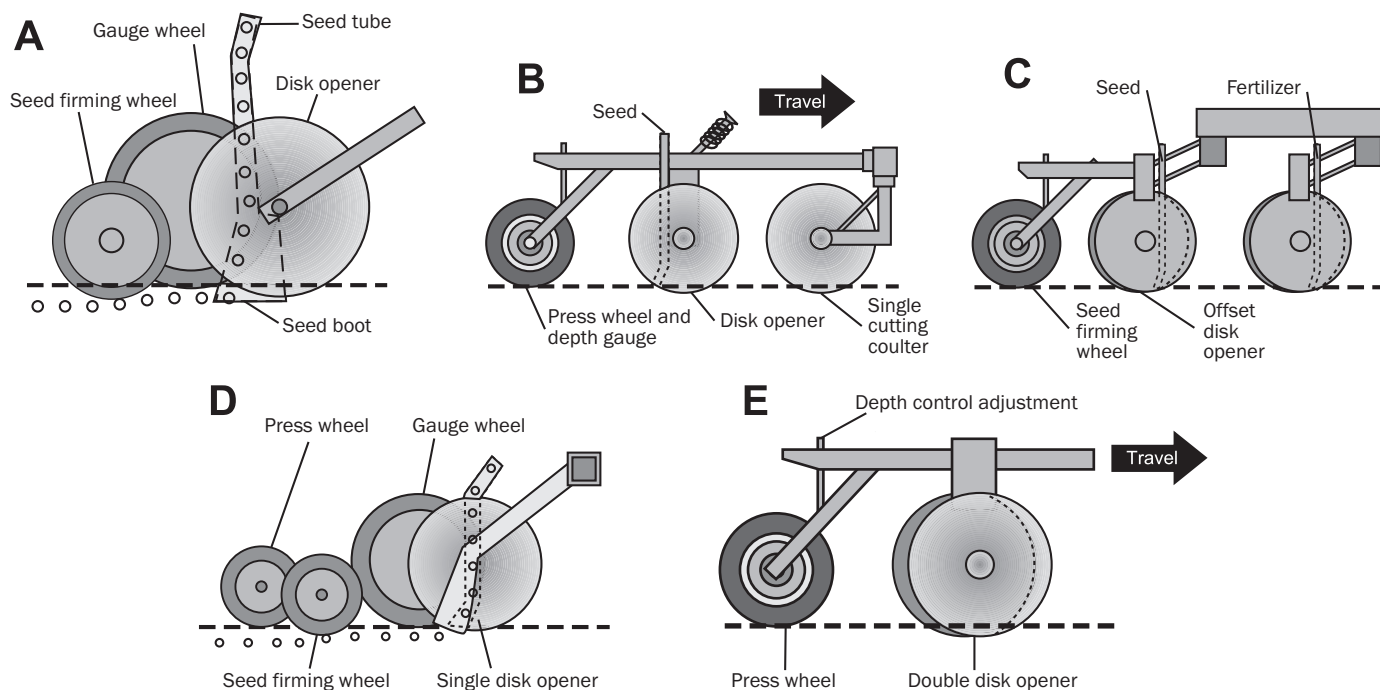


Figure 3. Diagram of typical seeding mechanisms: (A) single-disk opener, (B) single-disk opener with add-on coulters unit, (C) offset double disk openers with fertilizer opener mounted midway between seed openers, (D) gauge wheel mounted beside the seed-opener disk to maintain depth control, (E) press wheel mounted on the furrow-opener frame member to maintain depth control.

between the double disks, they will push residue into the furrow and have less ability to cut the residue. For offset double disk openers, a business-card-width gap should be maintained to prevent the trailing disk from cutting into the leading disk blade.

Maintain approximately 1.0 to 1.5 inch of contact between the two disks (see fig. 4). Adjustment washers are found in the double disk opener assembly; they allow some adjustment to compensate for wear. Machine bushings located on the spindle between shank and disc blade can be added or removed as required to maintain approximately 1.0 to 1.5 inch of contact between double disks. As the blade diameter decreases because of wear, it will be necessary to remove the machine bushings to maintain approximately 1.0 to 1.5 inch of contact. If approximately 1.0 to 1.5 inch of blade-to-blade contact cannot be maintained after removing machine bushings, if blade diameter is worn below the manufacturer's recommendations, or if the blade edge is bent, chipped, or jagged, the blade should be replaced.

Check end play of the disk opener by shaking it from side to side. With the single-row ball bearings, some

#### Machine Bushing

Minimum of two washers between arm and shank.

Minimum of one washer between arm and boot head.

Shim the depth wheel to lightly contact disc. Check adjustment during field operation.

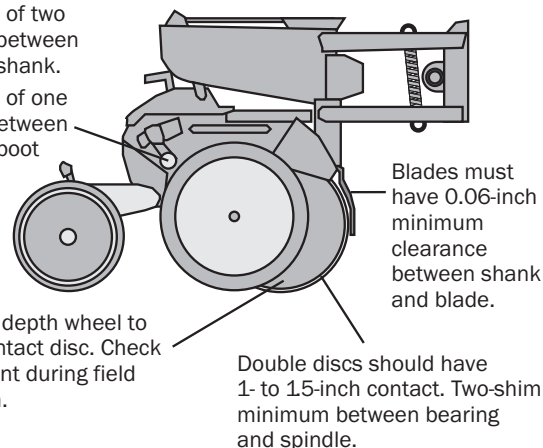


Figure 4. Adjustments to double disc openers on a planter unit.

end play will be normal. The disc is stabilized by the contact between the double disk openers. However, if end play is excessive and the bearing sounds dry when turned, replace bearing/hub assembly or complete disc assembly. Also, check to see that the bearing hubcap is in place. Replace the hubcap if it is lost or damaged.



## More on Weight and Down Pressure

Individual openers should have sufficient down pressure and independent depth control to allow movement up and down to ensure that all rows are operating at the same depth. Depending on coulter width, opener design, soil texture, and field conditions, up to 500 pounds per row may be necessary for adequate penetration. Down pressure springs on independent row units must transfer enough weight from the drill frame so that all meter wheels, seed openers, and depth-control devices and seed pressure wheels are firmly contacting the soil.

Having enough weight becomes more of a problem with drills simply because of the number of rows per unit width. A drill with 7.5-inch row spacing has four times the number of row units for a given width of operation as a planter with 30-inch spacing. Thus, to maintain adequate down pressure per unit, the total weight of a drill with 7.5-inch row spacing needs to be four times the weight of a planter with 30-inch row spacing. For instance, a six-row planter on 30-inch row spacing may require more than 3,000 pounds of weight (six rows times 500 pounds per row) just for cutting the residue and penetrating the soil. Whereas, a drill of the same width on 7.5-inch row spacing has 24 openers and may require more than 12,000 pounds for proper penetration. In some cases with insufficient drill weight, the springs may physically lift the meter drive wheel off the ground. Some manufacturers use a spring-loaded drive mechanism to keep the drive firmly in contact with the soil, but this still requires adequate total drill weight for proper operation.

## Seed Meter Devices

When comparing planter/drill systems, be sure to evaluate the different metering devices and their influence on germination and plant-stand consistency. For example, the conventional fluted meters for drills often result in poorly spaced stands with many gaps. To compensate for this stand variability, many operators will over-seed small grains by 10 percent to 20 percent. The interest in the drills with singulation devices similar to row-crop meter devices (see fig. 5) is due to the possibility of improving stands, reducing seed cost (from not overseeding), and reducing variability seen in conventional fluted-meter devices.

Research shows that conventional fluted-meter devices evaluated for variable-rate seeding are not very accurate. Fluted meters have a cup on a rotating shaft and an



Figure 5. Seed metering for seed singulation on a grain drill. Meter device is shown with gear and chain drive (see fig. 6 for location).

opening gate. The tests show that changing the shaft speed, forward speed, or gate opening greatly hindered the accuracy of population and spacing of the seed. As the seeds increased in size, the variability was even greater. The conventional fluted-drill meter devices do not need singulation accuracy because small grains can usually compensate for the inconsistency. This may not be the case for soybeans and definitely not for corn. Some accuracy and spacing uniformity can be gained with very specific travel speeds and fixed population. Accuracy degrades quickly if travel speed is not consistent. Another problem that contributes to the lack of seed-spacing uniformity is the distance from the meter to the seed furrow. Seed bounce and travel in the seed delivery tube greatly influence the spacing uniformity.

With these inherent problems of conventional fluted-meter devices, manufacturers have designed spiral cup, belted meters, and meter devices that singulate out the individual seeds (potential to plant corn). Designers also moved the meter device closer to the ground (fig. 6) to reduce the travel distance to the seed furrow. The



Figure 6. Precision seeding system with seed meters close to the ground ("A" marks the metering device).



Figure 7. Planter equipped with extra planter boxes to plant 15-inch rows.

new meter device on the Precision Seeding System™ by Great Plains Manufacturing, Salina, Kansas, has singulation features and a narrow profile that allows 7.5-inch drill spacing.

Manufacturers have also adapted row-crop planters (see fig. 7) for narrow row (15-inch) spacing to give producers the seed singulation and spacing accuracy as well as a machine that could be used for both drilled and row-crops. Several manufacturers have configured row-crop planters so that they are easy to convert from 15- to 30-inch row spacing.

Because the meter devices of some systems are close to the ground, they are difficult to calibrate and check the seed population. Most manufacturers recommend a static test by rotating the meter drive wheel. While this can be a reflection of the accuracy and uniformity of the individual units, it may not give accurate measurements for field conditions. Be prepared to spend some time in the field observing the seed spacing and calculating seeding population by digging into several seed furrows.

Several seed companies plus a number of equipment dealers offer meter testing with the use of planter test stands. One of the more popular test stands being used is called the Meter Max, manufactured by Precision Planting, Tremont, Illinois. This type of meter test stand not only measures the accuracy of seeding rate, but also produces the uniformity statistics of the seed drop by virtue of the seed dropping onto a horizontal seed belt.

## Benefits of Automatic Section Control Technology

Automatic section control (ASC) is a precision farming technology that turns planter meters OFF in areas that have been previously covered, or ON and OFF at headland turns, point rows (fig. 8), terraces, and/or waterways. The adoption of automatic section control or auto-swath technology has been widely adopted across the U.S. Originally, this technology was developed for use on agricultural sprayers, but more recently, solutions for planters and other application equipment exist. Practitioners adopting this technology have experienced tremendous benefits, including a reduction of overall input usage and increased field efficiencies. These benefits have resulted in economic savings on inputs, as well as improved environmental stewardship at the farm level.

The cost of this technology is relatively cheap compared to other precision agriculture technologies, such as auto-guidance systems. In fact, farmers who have adopted application controllers and are using GPS receivers for various reasons may already have several of the components necessary to implement this technology. Therefore, only a few additional items are required, decreasing the initial purchase price.

A recent study conducted at Auburn University indicated that farmers can experience, on average, about a 7 percent savings on inputs for their operation. Savings included using this technology on sprayers, planters, and nitrogen sidedress units. Using crop production costs revealed an average savings of \$4.83 per acre per year when implementing on a sprayer and planter. Field shape and size along with crops produced dictated the level of savings. The potential input savings can be substantial, especially considering current and expected cost increases for crop inputs. Utilizing a guidance system in conjunction with ASC can significantly improve field efficiency while providing input savings. Generally, ASC technology can pay for itself over one to two growing seasons.

Benefits of ASC technology include:

1. Improved overall planter accuracy.
2. Reduced overlap, thus reducing overall input costs.
3. Improved environmental stewardship.



4. Reduced crop damage from overapplication.
5. Improved application efficiency.
6. Optimized operator efficiency.



Figure 8. Using automatic section control (ASC) to stop planter meters on point rows. Eliminates skips and overlaps and saves money on seed.

## Corn Plant Space Variability

Properly adjusted corn planters can singulate and uniformly space seed. Even stands reduce plant-to-plant competition and take maximum advantage of sunlight to produce increased yields. Doubles or triples and large gaps can result in lost yield potential. Research indicates that a 1-inch increase in standard deviation of corn plant spacing results in yield losses up to 2.5 bushels per acre. A 10-year study of stand observations from more than 350 corn fields found that 84 percent of the fields had a standard deviation in plant-to-plant spacing of more than 4 inches, which translated into potential yield losses of 5.0 to 12.5 bushels per acre.

Researchers concluded that skips contribute to the standard deviation or plant-to-plant variability slightly more than doubles. They further concluded that skips reduce yield in fields where the intended population is at or below the optimum, while doubles increase yield when populations are less than optimum.

Three key points from this research are:

1. An adequate plant population should be selected.

2. Depending on the season, plant-to-plant spacing variability may not always result in yield loss.
3. Skips limit yield more than doubles.

## Seed Tube Guard

The seed-tube guard protects the seed tube and acts as the inner scraper for the double disk opener. Remove the seed tube and check for wear. Excessive wear on the seed tube indicates a worn seed-tube guard. No-till planting or planting in hard ground conditions will greatly increase seed-tube guard wear and necessitate frequent inspection. Additional side pressure of the double disk opener against the guard also causes increased wear.

Initial width of the guard at the lower end is approximately 0.88 (7/8) inch. When the seed tube guard is worn to approximately 0.5 inch, replace it. If the guard is worn excessively, it may also allow dirt buildup on the inside of the disc blade and cause seed to be flipped out of the seed trench by the disc openers.

## Press Wheels and Depth Control

There are two methods for seed-depth control on most no-till planter/drill systems: (1) setting the depth from a gauge wheel adjacent to the seed furrow device (figs. 3-A and 3-D), or (2) adjusting press wheel pressure behind the seed furrow openers (figs. 3-B, 3-C and 3-E). In either case, keep adequate pressure on the gauge or press wheel to force the openers into the soil to the proper depth. A harrow behind a drill ensures seed coverage and redistributes residue for effective conservation measures. Regardless of the depth control, wide-flat press wheels (fig. 2-C) are unacceptable for no-till since they will ride on the firm soil adjacent to the seed furrow and will not firm the seed into soil. A wide press wheel equipped with a rib that runs on the sides of the seed furrow or a rib that runs directly over the furrow to press the seed is adequate for good seed-to-soil contact (see fig. 2-E).

Another option is to use a pair of angled press wheels (Fig. 2-F) behind the opener to close the seed furrow at the same time. When using angled press wheels, ensure that pressure is not placed on the seed furrow to the point that a ribbon of soil moves the seed up. If avail-

able, adjust the angle such that the angle of the press wheels meets at the seed depth.

The disadvantage of any system using the press wheel for depth control is its distance from the seed opener. As the distance increases there is a greater possibility that irregular terrain will influence both depth control and the press wheel's ability to provide good seed-to-soil contact.

Sufficient weight must remain on the press wheels to ensure firming of the seed into the soil. Wet soil is easily compacted and care must be taken not to over pack the soil, making it difficult for seedling roots to penetrate the soil. In dry soil conditions, extra closing force may be needed. The key is to evaluate seed-to-soil contact, not the top of the seed-vee. As long as the contact is there, something as simple as a harrow that acts to close the top of the vee and pull light residue cover back over the vee may be all that is needed. This is a common practice on drills that use a narrow press wheel.

## Setting Planters and Drills for the Season

When the weather and time are right for planting, producers should be in the field planting, not getting equipment ready and making last-minute repairs. All repairs should be made at the end of planting season when problems are fresh in producers' minds.

**In the shop.** – Read the owner's manual for suggested maintenance and lubricate as directed. Check the operation of the seed metering devices and replace worn parts. Adjust the seed metering devices using this year's seed to match seed size and shape. Check, adjust, and lubricate chains, sprockets, bearings, and fittings. Replace worn ones. Adjust or replace the seed-furrow opener disks and other ground engaging components. Properly inflate all tires, including those on the tractor.

**In the field before planting season.** – Set the toolbar and the hitch point at the proper height to match soil conditions. Level the planter from front to rear, slightly tail down to help with seed-to-soil contact. Blind plant (or use old seed) for a short distance to check operation: check residue cutting and handling, check penetration to desired seeding depth, evaluate seed-to-soil contact, and evaluate closing the seed-vee. Adjust down pressure

springs to improve residue cutting and seedbed penetration. Add weight as needed for the down pressure springs to work against and to keep the drive wheels in firm contact with the ground to avoid slippage.

## General Operation

Adjustments may be needed as soil and residue conditions change. Continuously monitor planter performance and make adjustments as conditions dictate. Because the planter/drill system must handle and cut the residue, allow the residue to dry and become crisp before planting. These conditions aid in the cutting and handling of the residue. The weight of the drill and pressure from the down pressure springs are essential for cutting residue, penetrating the soil, and preventing seed openers from bouncing over residue. Most manufacturers suggest operating speeds of 6 to 10 mph. While this hinders accurate metering from fluted-meter devices, a higher operating speed assists in residue flow, especially for planter/drills equipped with a coulter caddie and/or a harrow.

**In the field during planting season, especially when changing fields.** – Check residue cutting and handling. Leave more residue over the row as the weather warms up to reduce seedbed drying. Check planting depth and seed-to-soil contact. Back off on pressure in wet soils that are easily compacted. Slow down to improve seed placement uniformity. Check seed spacing for proper population. Adjust harrows on drills to redistribute residue and help close the seed-vee.

**Check seed depth.** – Drill depth control surveys indicated a strong tendency to plant much deeper than intended. Only 20 percent of the producers were at or near the intended depth, and 68 percent of the fields were planted too deep. Excessive depth delayed germination and reduced stands. These same surveys found that producers are much more accurate with population rate than with planting depth.

**Check for seeds on the ground.** – The closure and seed-to-soil contact device should be adjusted if seeds are found on the soil surface.

**Varying soil and residue conditions across the field.** – If depth control is insufficient due to soft soil conditions (sandy soils) or if residue amounts are changing, check to see if the manufacturer offers some additional down pressure spring kits that activate more spring

pressure as conditions dictate and less when the down pressure is not needed.

**Check for hairpinning.** – When operating a planter/drill system in heavy residue, residue may be pushed in the seed furrow (hairpinning), reducing seed-to-soil contact and slowing or reducing germination. Make sure the cutting angle on the coulter is correct (coulter depth should not exceed one-third the coulter radius) and the cutting edge is sharp. Depending on the conditions, a smooth coulter may provide the needed cutting of residue better than a fluted coulter. The hairpin effect is minimized when seeding units operate on a firm soil and when residue is dry and crisp. Simply waiting until a little later in the day, when residue is drier, may greatly improve the operation of the planter/drill system.

**Erratic Operation.** – Any time the operation of the planter causes the metering unit to jerk, variable seed placement will occur. Adjust all elements of planter operation for smooth performance. Observe and adjust planting speed to match ground conditions.

## Servicing Seeding Equipment

Check out the related resources for links to service support Web pages. Here are some general guidelines and tips for planter maintenance and adjustments.

- Clean the planter/drill inside and out. This should be done before the unit is sheltered. Check for old seed left in the hoppers, mouse nests, spiders, insects, buildup from seed coatings, and anything else that may interfere with the operation of the seed meter or seed drop tubes.
- Check and replace all worn out parts.
- Ensure that coulters and openers are aligned accurately.
- Replace worn seals and check trueness of fit.
- Adjust or replace worn openers.
- For finger-pickup-type meters, check finger-pickup back plates for rust buildup, seed treatment residues, and worn down “dimples.” Check and adjust finger tension.
- Check condition of seed belt. Also, check condition of belt sprocket teeth.

- Replace worn chains. Lubricate or replace chain links.
- Inflate tires to the correct inflation pressure.
- Clean seed tubes and monitor sensors to ensure accurate monitoring of seed flow.
- Replace seed tubes if excessively worn at bottom.

## CALIBRATE!

- For all metering units:
  - Calculate and record the seed weight for each seed lot you intend to plant.
  - For air/vacuum metering, identify and record the correct pressure (air or vacuum) for the calculated seed weight and identify the correct seed disc (or drum) for the calculated seed weight.
- Double-check the operations manual and identify the correct transmission setting for the desired seeding rate.
- Calibrate actual seed drop against:
  - Planter transmission settings.
  - Planter monitor readouts.
- Calibrate at normal planting speeds and seeding rates.
  - Calibrate the planter in as close to field conditions as possible, not in the farm lane or dry soil.
- Calibrate pesticide and fertilizer planter attachments at the same time because application rates can easily change from year to year.
- Check that the planter toolbar is parallel to the ground when planter is in use because this affects disc opener depth, press wheel efficiency, and seed-to-soil contact.

## Summary

Successful planting/drilling with no-till equipment depends on specially designed systems that can uniformly place seed through heavy residue and into firm, moist soil. No-till equipment is available to achieve these results for good yields.



## Resources

Dickey, E. C., and P. Jasa. 1989. *Row Crop Planters: Equipment Adjustments and Performance in Conservation Tillage*. NebGuide G83-684. University of Nebraska Cooperative Extension.

Fulton, J., D. Mullenix, A. Brooke, A. Winstead, and B. Ortiz. 2011. *Automatic Section Control (ASC) Technology for Planters. Precision Agriculture Series: Timely Information*. Alabama Cooperative Extension System. <http://tinyurl.com/m2kr7az>.

Iowa State University. 2000. *Conservation Tillage Systems and Management: Crop Residue Management with No-till, Ridge-till, Mulch-till, and Strip-till*, 2nd ed. Publication No. MWPS-45. Ames, Iowa: MidWest Plan Service.

## Related Service Websites

Case-IH Agriculture, Parts & Service – [www.caseih.com/en\\_us/PartsService/Pages/parts-service.aspx](http://www.caseih.com/en_us/PartsService/Pages/parts-service.aspx)

Deere & Co., Services & Support – [www.deere.com/en\\_US/ag/servicesupport/index.html](http://www.deere.com/en_US/ag/servicesupport/index.html)

Great Plains Manufacturing – [www.greatplainsmfg.com](http://www.greatplainsmfg.com)

Kinze Manufacturing– [www.kinze.com](http://www.kinze.com)

Kinze Manufacturing. Kinze Model 3600 Series Lubrication and Maintenance Reference Guide (M0236-01) – [www.kinze.com/filesimages/blog/MeterMaint.pdf](http://www.kinze.com/filesimages/blog/MeterMaint.pdf)

Kinze Manufacturing. Kinze Model 3600 Twin-Line Planter Operator's Manual (M0249-01) – [www.kinze.com/filesimages/manuals/3600%2070CM%20M0249-01%20R0514.pdf](http://www.kinze.com/filesimages/manuals/3600%2070CM%20M0249-01%20R0514.pdf)

Precision Planting – <http://precisionplanting.com>

S.I. Distributing Inc. – [www.sidist.com](http://www.sidist.com)

Chris Teutsch, associate professor and VCE forage specialist, crop and soil environmental sciences, Southern Piedmont AREC; Matthew Lewis, former VCE agent, Northumberland County Office; Scott Reiter, VCE agent, Prince George County Office; Brad Jarvis, VCE agent, Madison County Office; Wade Thomason, professor and VCE grains specialist, crop and soil environmental sciences — all from Virginia Tech; Chris Lawrence, agronomist, USDA-NRCS, Richmond, Virginia; and Keith Burgess, conservation specialist, Monacan Soil and Water Conservation District.

## Acknowledgements

The authors express their appreciation for the review and comments made by Joel Faircloth, former assistant professor and Virginia Cooperative Extension cotton/peanut specialist, crop and soil environmental sciences, Tidewater Agricultural Research and Extension Center;

## 2024 Exhibitor Directory

### **ADVANCE AGRA SERVICE LLC**

Contact: Nelson Eberly  
8955 Wise Hollow Road  
Bridgewater, VA 22812  
540-420-0017  
nelson@advanceag.net  
www.advanceag.net  
*Seed sales & delivery, Liquid fertility & biology,  
Proven 40 microbial nitrogen (seed applied)*

### **AGRABILITY VIRGINIA**

Contact: Kim Niewolny  
282 Litton Reaves Hall  
Virginia Tech  
540-231-5784  
Niewolny@vt.edu  
www.agrabilityvirginia.org  
*AgrAbility Virginia assists farmers, farmworkers  
and their families who identify with illness, injury  
or disability. We promote safety, wellness and  
accessibility on the farm through education, reha-  
bilitative services and assistive technology.*

### **AGRITEER**

4310 South Valley Pike  
Rockingham, VA 22801  
(800) 735-3584  
www.agriteer.ag  
*New and used equipment sales and service*

### **AUGUSTA SEED**

Contact: Steve Collins  
P. O. Box 899  
Verona, VA 24482  
540-248-2523  
Steve.collins@augustaseed.com  
www.augustaseed.com  
*Hybrid seed corn*

### **BASF**

Contact: Daniel Fleishman  
540-383-1688  
Daniel.fleishman@basf.com  
<https://agriculture.basf.us/crop-protection.html>  
*BASF Ag Solutions*

### **BAYER CROP SCIENCE**

Contact: Heidi Dillehay  
State of Virginia  
862-330-9666  
Heidi.dillehay@bayer.com  
<http://www.bayer.com>  
*Crop Protection*

### **CHERRY GROVE FARM, LLC**

Contact: Linden Heatwole  
540 Mayland Rd.  
Broadway, VA 22815  
540-810-4560  
lindenbubba@aol.com  
Www.Conklin.com  
*Soil & tissue testing, seed treatments, Nitrogen  
management, fertilizers, plant growth regulators,  
adjuvants, forage treatments*

### **CHESAPEAKE BAY FOUNDATION**

Contact: Alston Horn  
1108 E. Main Street, Suite 1600  
Richmond, VA 23219  
540-487-9060  
ahorn@cbf.org  
www.cbf.org  
*Outreach and technical assistance for agriculture  
conservation practices*

### **COLONIAL SOIL AND WATER CONSERVATION DISTRICT**

Contact: Samantha Pereira  
205 C Bulifants Blvd  
Williamsburg, VA 23185  
757-759-0528  
Samantha.pereira@colonialswcd.org  
Www.colonialswcd.org  
*Prompting Alliance to Advantage Climate-Smart  
Agriculture Grant*

### **CORTEVA AGRISCIENCE**

Contact: Sarah Lundy  
Raleigh, NC  
757-617-0213  
Sarah.lundy@corteva.com  
Www.corteva.com  
*Ag Chem*

## 2024 Exhibitor Directory

### **CRABBE AVIATION**

Contact: Matt Crabbe  
P. O. Box 219  
Manquin, VA 23106  
804-334-7370  
crabav@gmail.com  
Www.crabbeaviation.com  
*Aerial application*

### **FARM CREDIT OF THE VIRGINIAS**

Contact: Matt Weston  
4646 South Valley Pike  
Harrisonburg, VA 22801  
540-383-2715  
mweston@fcvirginias.com  
www.farmcreditofvirginias.com  
*Loans for farms, homes and land!*

### **F&M BANK**

Contact: Daniel Scott  
Myers Corner  
Staunton, VA 24401  
540-699-3145  
dscott@fmbankva.com  
www.fmbankva.com  
*Agribusiness Financing*

### **THE FIRST BANK & TRUST COMPANY**

Contact: Bethany Reedy  
120 University Blvd.  
Harrisonburg, VA 22801  
540-437-0604  
breedy@firstbank.com  
www.firstbank.com  
*Financial Services*

### **THE FRAZIER QUARRY, INC**

Contact: Kevin Headley  
75 Waterman Drive  
Harrisonburg, VA 22802  
540-810-0668  
Kevin.headley@frazierquarry.com  
https://www.frazierquarry.com  
*Family owned and Operated for over 100 years.  
Providing Ag lime, Crushed Stone, Landscaping  
Stone and Building Stone.*

### **HISTAND SERVICES, LLC**

Contact: Marcus Histand  
6610 Rawley Pike  
Hinton, VA 22831  
540-705-7815  
histandservices@gmail.com  
Www.Histandservices.com  
*Agricultural electric, plumbing and farm/feedlot  
equipment*

### **HOUFF CORPORATION**

Contact: Duane McAllister  
97 Railside Dr.  
Weyers Cave, VA 24486  
540-234-9246 (office)  
duane.mcallister@houffcorp.com  
www.houffcorp.com  
*Commercial Application of Fertilizer and Herbi-  
cides, Comprehensive Crop Planning and Service,  
Seed Sales*

### **KING'S AGRISEEDS, INC.**

Contact: Harrison Fritz  
717-723-2651  
info@kingsagriseeds.com  
Www.kingsagriseeds.com  
*High Energy Forages, Soil Building Cover Crops*

### **LUSH AI**

Contact: Joseph Bender  
2941 Harpine Highway  
Rockingham, VA 22802  
540-820-0174  
Joe.bender@lush-ai.com  
Www.lush-ai.com  
*Millimeter Resolution Whole Field Aerial Scanning,  
Data Analysis, Spot Spraying Maps*

### **NEUDORFF USA**

Contact: Eric Maurer  
3100 Riverwalk Drive  
Annapolis, MD 21403  
443-221-3732  
Eric.maurer@neudorff.com  
Www.neudorffpro.org  
*Slug and Snail Baits*

## 2024 Exhibitor Directory

### **OSPREY DRONE SERVICES, LLC**

Contact: Peter Shanley  
11185 Gordon Heights Road  
Gordonsville, VA 22942  
413-884-5022  
pete@osprey-drones.com  
Www.osprey-drones.com  
*Corp imaging, Aerial spraying and seeding,  
Agriculture Drone sales*

### **ROCKBRIDGE FARMERS COOP, INC**

Contact: Wilson Whitmore  
645 Waddell Street  
Lexington, VA 24450  
540-463-7381  
wwhitmore@rfcoop.com  
Www.rockbridgefarmerscoop.com  
*Farm supply and Equipment*

### **ROCKINGHAM COOPERATIVE**

Contact: Daniel Myers  
112 Meigs Lane  
Dayton, VA 22821  
540-810-2047  
dmyers@rockinghamcoop.com  
www.rockinghamcoop.com  
*Full service agronomy, feed, etc.*

### **SHENANDOAH VALLEY SOIL AND WATER CONSERVATION DISTRICT**

1934 Deyerle Avenue, Suite B  
Harrisonburg, VA 22801  
540-534-3105  
www.svswcd.org  
*We work with the people who work the land ,  
Administering the Virginia Agricultural Cost Share  
(VACS) Program and Virginia Equipment Tax Credit  
Program*

### **S. L. HESS AND SONS / MEHERRIN AG**

Contact: Jeff Phillips  
1795 South High St.  
Harrisonburg, VA 22801  
540-434-5916  
jeff@slhessandsons.com  
www.slhessandsons.org  
*Fertilizer, Seed, Crop Protection products and  
Service*

### **SOUTHLAND DAIRY FARMERS**

Contact: John Crawford and Morgan Cole  
1904-A Fairfax Road  
Greensboro, NC 27407  
336-808-5174  
johnncrawford@southlanddairyfarmers.com  
www.southlanddairyfarmers.com  
*Southland Dairy Farmers promotes and educates  
the general public on milk and other dairy prod-  
ucts. Southland Dairy Farmers is supported by  
dairy farmers through the dairy check off program.*

### **TIMAC AGRO**

Contact: Daryl Clay  
524 Bermuda Hundred  
Chester, VA 23836  
757-556-7117  
Daryl.clay@timacusa.com  
Www.timacagro  
*Liquid and dry fertilizers with bio-technology  
additives.*

### **USDA NATURAL RESOURCES CONSERVATION SERVICE (NRCS)**

Contact: Your local NRCS office  
(or Chris Lawrence, State Cropland Agronomist)  
Find your local office at : [www.va.nrcs.usda.gov](http://www.va.nrcs.usda.gov)  
(or Chris Lawrence at 1606 Santa Rosa Road,  
Suite 209, Richmond, VA 23229)  
Phone your local office  
(or Chris Lawrence at 804-287-1680)  
Email your local office  
(or [Chris.lawrence@usda.gov](mailto:Chris.lawrence@usda.gov))  
[Www.va.nrcs.usda.gov](http://Www.va.nrcs.usda.gov)  
*Technical assistance for planning wide range of  
conservation practices. Financial assistance for  
conservation practice implementation.*

### **VALLEY FERTILIZER & CHEMICAL CO., INC**

Contact: James Janney  
201 Valley Road  
Mount Jackson, VA 22842  
540-477-3121  
vfjames@shentel.net  
Www.valleyfertilizer.net  
*Fertilizer, Ag chemicals, Wholesale & Retail,  
Seed and Ice Melt*

# 2024 Exhibitor Directory

**VIRGINIA SILO**

Contact: Daren Showalter  
4446 Rawley Pike  
Harrisonburg, VA 22801  
540-810-7487  
daren@virginiasilos.com  
*Grain bin and Farm Feeding System Sales & Service*

**VIRGINIA SOYBEAN ASSOCIATION**

Contact: Rachel Gresham  
P.O. Box 923  
Goochland, VA 23063  
804-466-1693  
Rachel.gresham@vasoybean.com  
www.vasoybean.com  
*Represent Virginia’s Soybean growers and industry. Provide educational outreach regarding soybeans and the soy industry.*



United States  
Department of  
Agriculture

Natural Resources Conservation Service

**NRCS has been a proud top-level exhibitor at every VANTAGE Winter Conference**

***Thanks for many years of great meetings and partnership!***



**Visit your local NRCS office to learn how our conservation planning and financial assistance can help improve your operation.**

USDA is an equal opportunity employer and provider